


- 



Technical drawing of a 250mm long metal rail assembly. The drawing includes a side view and a top view. The side view shows the rail with dimensions: TR (total length), SL (480.0), 9.0, 128.0, G, H, I, 11.4 TYP., 12.7, 12.7 TYP., 21.6, 34.3, and 19.0. The top view shows the rail with dimensions: 35.0, 60.5, A, B, C, D, E, F, 9.0 TYP., 11.2†, 4.7x7.9 TYP., Ø4.4 TYP., 4.4x9.5 TYP., 4.4x9.5 TYP., Ø4.6 TYP., Ø6.4 TYP., Ø4.6, and 19.0. A detail view shows a cross-section of the rail with dimensions: 32.0, *2132DO-550mm, and 19.0. A note at the bottom right states: † Geen montagegat bij lengte 250 mm.

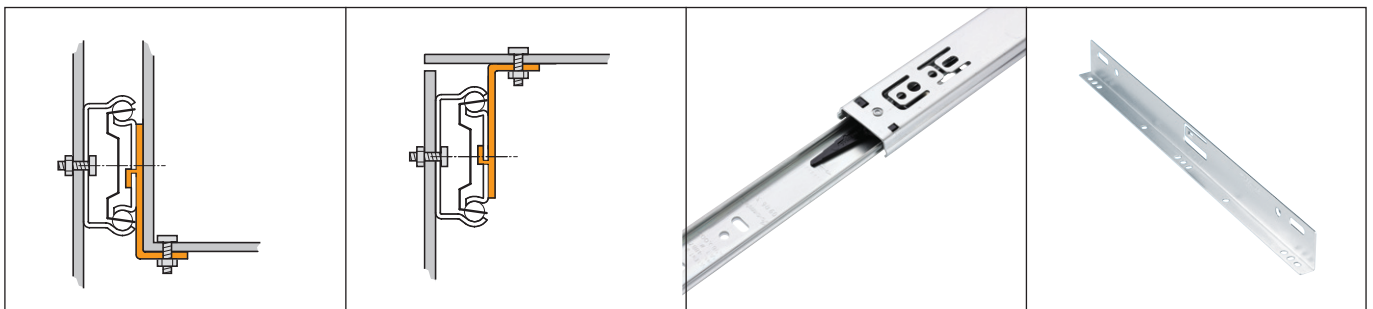

SL: Lengte geleider TR: Uitschuiflengte geleider W: Gewicht geleiders per paar in kg L: Belasting per paar bij 10.000 en 80.00 cycli

- Om de aangegeven maximale belasting te bereiken, dienen alle montageposities gebruikt te worden.
- Voor montage worden M4/4 mm schroeven aanbevolen, met een max. kophoogte van 2.5 mm en max. kop $\varnothing 9.6$ mm.
- Alleen geschikt voor verticale montage.